4-Port FireWire 400
PCI Host Card

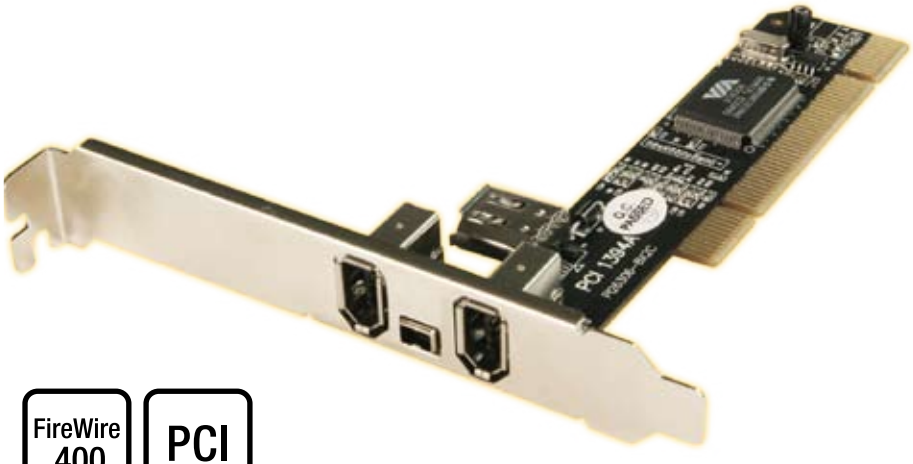

Hot-Swap Devices
connect FireWire
w/o powering down system

4 FireWire 400 Ports
3 external & 1 internal

FireWire 400 | PCI

FEATURES

- VIA VT6306 chipset
- PCI 32-bit 33MHz Interface
- Compliant IEEE 1394-1995, 1394a (rev. 1.1) and OHCI Interface Specification 1.0
- Supports data transfer rates of up to 400 Mbps
- Hot-swappable: Allows you to connect/disconnect devices without powering down your system
- Adds four IEEE 1394a (FireWire 400) ports to your PC for high-speed I/O connectivity and support up to 63 devices
- One internal IEEE 1394a port (sharing with first external IEEE 1394a port P2
- Supports various brands of DV camcorders

SPECIFICATIONS

- Model: UGT-FW050
- Ports: 2 x External Firewire 400 (6-Pin)
- Dimension: 122 x 120 x 18mm

SYSTEM REQUIREMENT

- Computer with one available PCI slot
- Windows® 2000, XP/2003 32/64bit, Vista 32/64bit

PACKAGE CONTENTS

- 4-Port FireWire 400 PCI Host Card x1
- 1394a DV Cable (6-Pin to 4-Pin) x1
- User's Manual x1

Vantec Thermal Technologies
Tel : (510)668-0368
Fax: (510)668-0367
43951 Boscell Rd., Fremont CA 94538, USA
www.vantecusa.com

All Registered Trademarks Belong To Their Respective Companies
Copyright © 2008 Vantec Technology Inc.All Rights Reserved

Vantec Technology Inc.
Tel : (02) 8792-3987
Fax: (02) 8792-0373
2F, No.588, Tanmei St, Neihu District, Taipei City 114, Taiwan (R.O.C)
www.vantec.com.tw